


**EBARA**

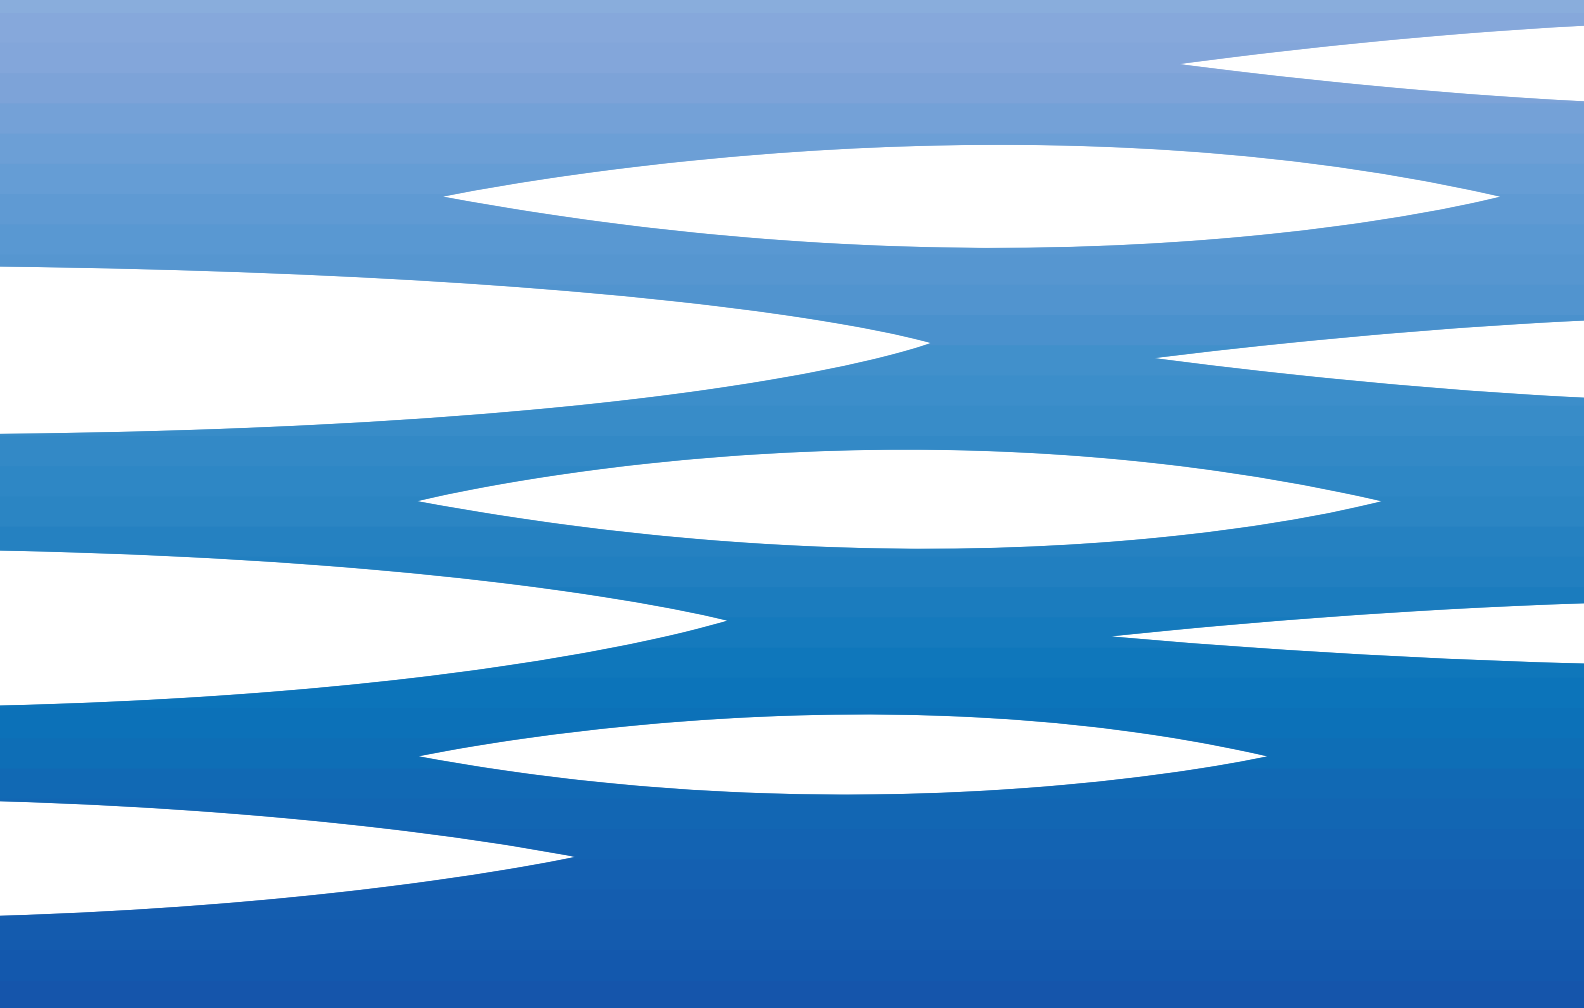

	Page
<b>- SPECIFICATIONS</b>	<b>200</b>
SELECTION CHART	201
TYPE KEY AND CURVE SPECIFICATIONS	202
PERFORMANCE CURVE BEST 2	203
PERFORMANCE CURVE BEST 3	203
PERFORMANCE CURVE BEST 4	203
PERFORMANCE CURVE BEST 5	203
<b>- CONSTRUCTIONS</b>	<b>300</b>
SECTIONAL VIEW	300
MECHANICAL SEAL	301
<b>- DIMENSIONS AND WEIGHT</b>	<b>400</b>
PUMP	400
PACKING	401
<b>- TECHNICAL DATA</b>	<b>500</b>
<b>- INSTALLATION</b>	<b>600</b>

**SPECIFICATION**

60Hz

Rev. 0


PUMP		
Liquid Handled	Type of liquid	Clean / Dirty water
	Max temperature [°C]	35
	Max solids size [mm]	10 (suspended particles)
Maximum immersion	[m]	10
Construction	Impeller	Open centrifugal type
	Shaft seal type	Double mechanical seal
	Bearing	Sealed ball bearing
Pipe Connection	Suction-Flange	Strainer
	Discharge-Flange [inch]	G 1½ UNI ISO 228
Material	Casing	AISI 304
	Impeller	AISI 304
	Casing cover	AISI 304
	Shaft seal	Pump side : SiC/SiC/NBR Motor side : Carbon/Ceramic/NBR
	Seal cover	AISI 304
	Shaft	AISI 303 (wet extension)
	Lubricating liquid	White mineral oil Esso Marcol 152 (180 cc)
Applicable standard of test	ISO 9906 - Annex A	

MOTOR		
Type	Submersible dry type	
	Single Phase	Three Phase
No. of Poles	2	
Rotation speed [min <sup>-1</sup> ]	≈ 3400	
Insulation Class	F	
Protection degree	IP X8	
Power rating	[kW]	0.55 ÷ 1.1
	[HP]	0.75 ÷ 1.5
Frequency [Hz]	60	
Voltage [V]	110-115 ±6% 220-230 ±6%	220/380 -6% +10%
Capacitor	Built in	-
Over load protection	Built in	-
Float Switch	Optional	-
Float Switch material	H07RN-F	-
Cable size	3G1	-
Casing material	AISI 304	
Power cable	length [m]	10
	material	H07RN-F
	size	3G1 (Best 2) 3G1.5 (Best 3, 4)
Dimensions of cable entry	Cable Gland	

**SELECTION CHART**


60Hz

Rev. 0

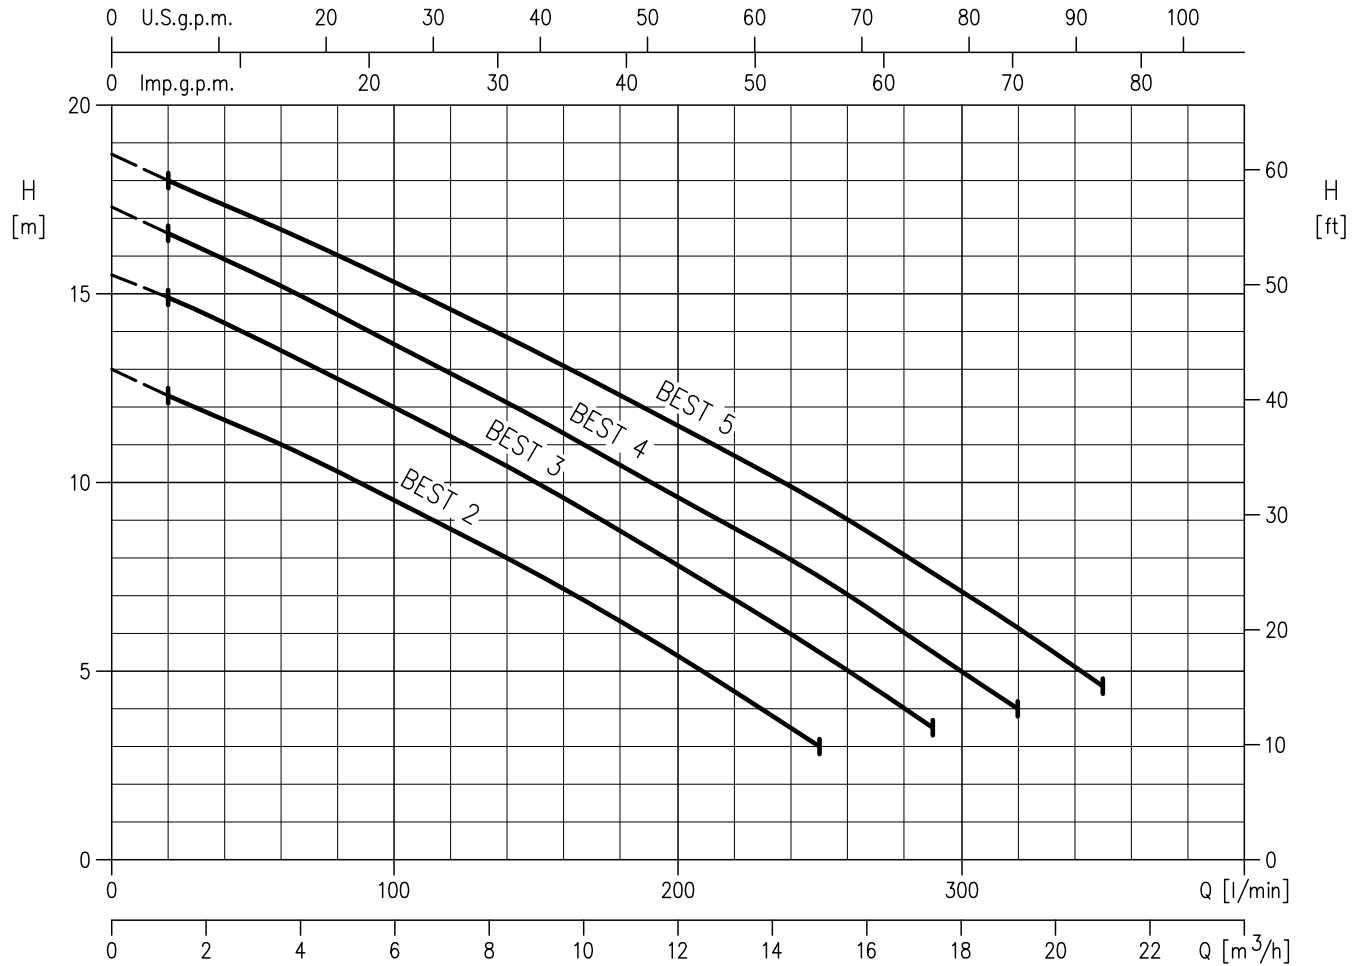

Pump type		Output		Q =Capacity										
Single phase	Three phase	kW	HP	l/min	0	20	50	100	150	200	250	290	320	350
				m³/h	0	1.2	3	6	9	12	15	17.4	19.2	21
H=Total manometric head in meters														
BEST 2M	BEST 2	0.55	0.75	13	12.3	11.4	9.5	7.6	5.4	3	-	-	-	-
BEST 3M	BEST 3	0.75	1	15.5	14.9	13.8	12.0	10	7.8	5.5	3.5	-	-	-
BEST 4M	BEST 4	1.1	1.5	17.3	16.6	15.5	13.7	11.7	9.6	7.5	5.5	4	-	-
-	BEST 5	1.5	2	18.7	18	17	15.3	13.5	11.5	9.5	7.6	6.2	4.6	-

**TYPE KEY**

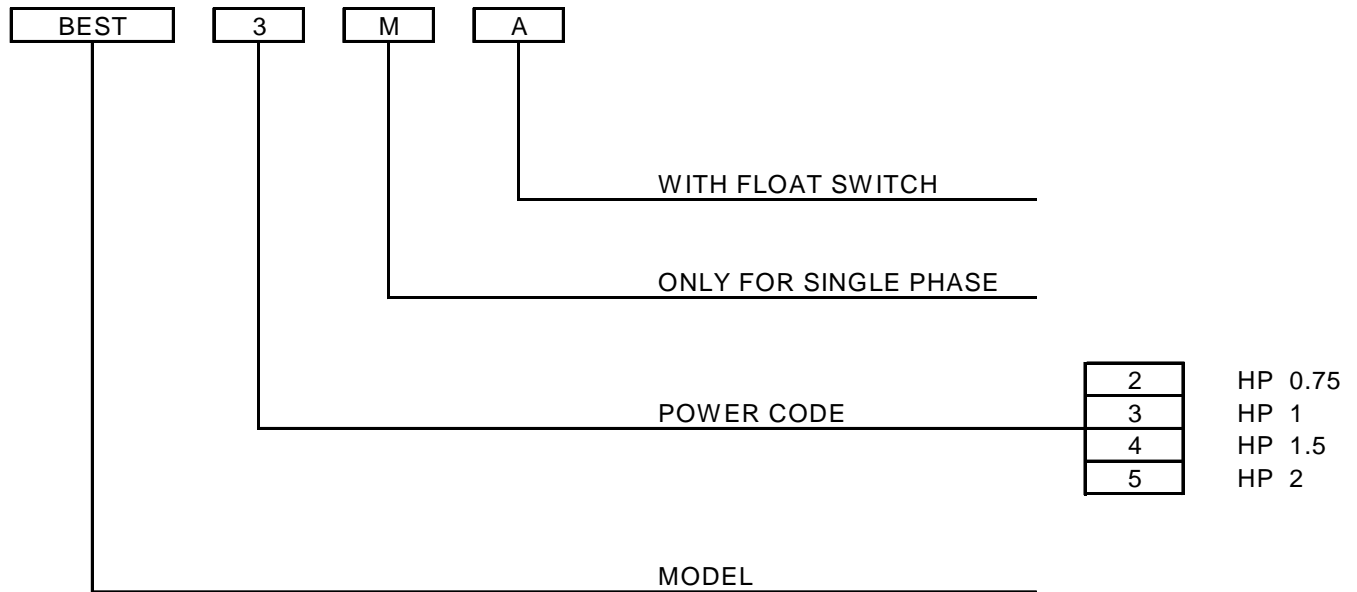

**PERFORMANCE CURVE SPECIFICATIONS**

The specifications below qualify the curves shown on the following pages.

Tolerances according to ISO 9906 Annex A

The curves refer to effective speed of asynchronous motors at 60 Hz

Measurements were carried out with clean water at 20°C of temperature and with a kinematic viscosity of  $\nu = 1 \text{ mm}^2/\text{s}$  (1 cSt)


The continuous curves indicate the recommended working range. The dotted curve is only a guide.

In order to avoid the risk of over-heating, the pumps should not be used at a flow rate below 10% of best efficiency point.

Symbols explanation:


Q = volume flow rate

H = total head

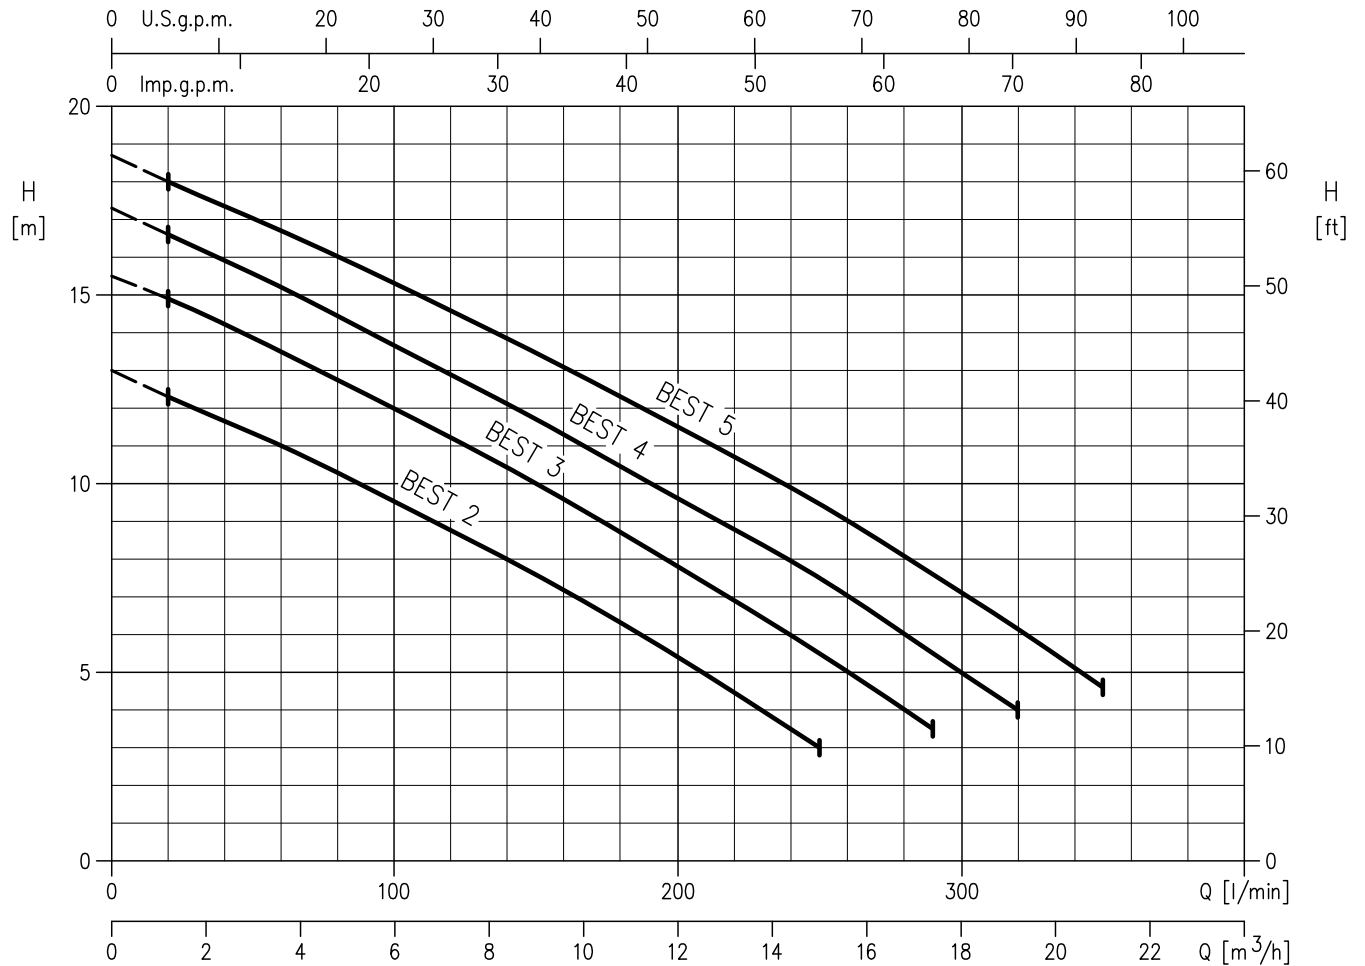

Rotation speed:  $\approx 3400 \text{ min}^{-1}$   
 Test standard: ISO 9906 – Annex A

SECTIONAL VIEW

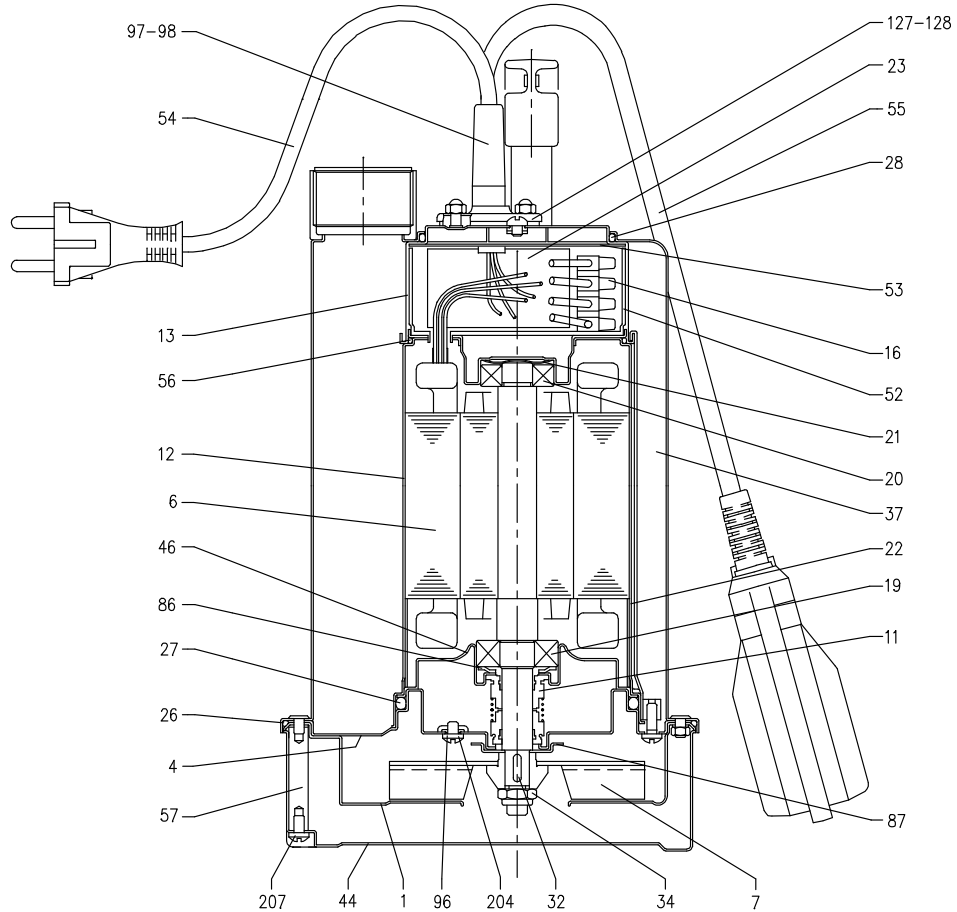


N°	PART NAME	MATERIAL	Q:TY	N°	PART NAME	MATERIAL	Q.TY
1	Volute	AISI 304	1	37	Pump casing	AISI 304	1
4	Motor bracket	AISI 304	1	44	Strainer	AISI 304	1
6	Shaft with rotor	AISI 303	1	46	Bearing housing	AISI 304	1
7	Impeller	AISI 304	1	52	Terminal insulating box	PA66	1
11	Mechanical seal	NBR	2	53	Terminal insulating cover	PA66	1
12	Motor frame with stator	-	1	54	Power cable	-	1
13	Motor cover	AISI 304	1	55	Float switch [1]	-	1
16	Terminal	-	1	56	"O" Ring	NBR	1
19	Pump side ball bearing	-	1	57	Bolt	AISI 303	3
20	Fan side ball bearing	-	1	86	Washer	AISI 304	1
21	Adjusting ring	Steel C70	1	87	Impeller ring	AISI 304	1
22	Tie rod	AISI 304	3	96	"O" Ring	NBR	3
23	Capacitor [2]	-	1	97	Cable connector [1]	NBR	1
26	"O" Ring	NBR	1	98	Cable connector	NBR	1
27	"O" Ring	NBR	1	127	Cable connector [1]	AISI 304	1
28	"O" Ring	NBR	1	128	Cable connector	AISI 304	1
32	Key	AISI 304	1	204	Screw	Stainless steel A2 UNI 7323	3
34	Impeller nut	AISI 304	1	207	Screw	Stainless steel A2 UNI 7323	3

[1] Only for version single phase with float switch

[2] Only for version single phase

**MECHANICAL SEAL**

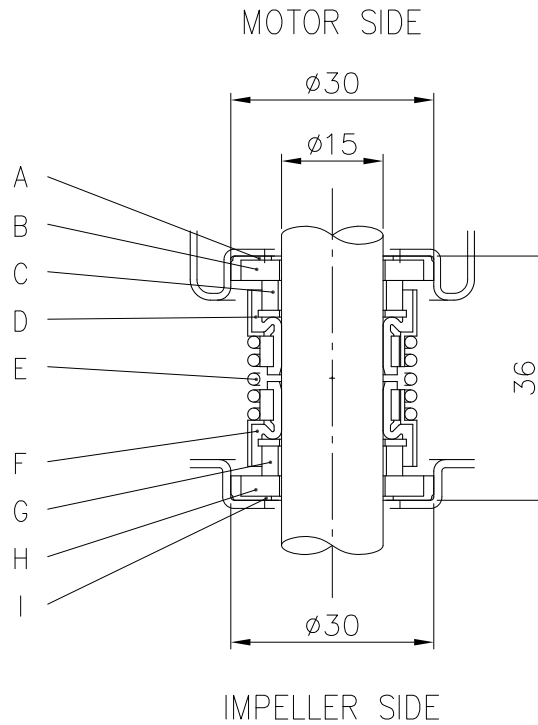


REF	PART NAME	MATERIAL
A	Rubber cup	NBR
B	Seat	Ceramic
C	Seal face	Carbon
D	Bellow	NBR
E	Spring	AISI 304
F	Bellow	NBR
G	Seal face	Silicon carbide
H	Seat	Silicon carbide
I	Rubber cup	NBR

**BEARINGS**


Pump type		Ball Bearing	
Single Phase	Three Phase	Pump side	Fan side
BEST 2M	BEST 2	6203 ZZ	6202 ZZ
BEST 3M	BEST 3	6203 ZZ	6202 ZZ
BEST 4M	BEST 4	6203 ZZ	6202 ZZ
-	BEST 5	6203 ZZ	6202 ZZ



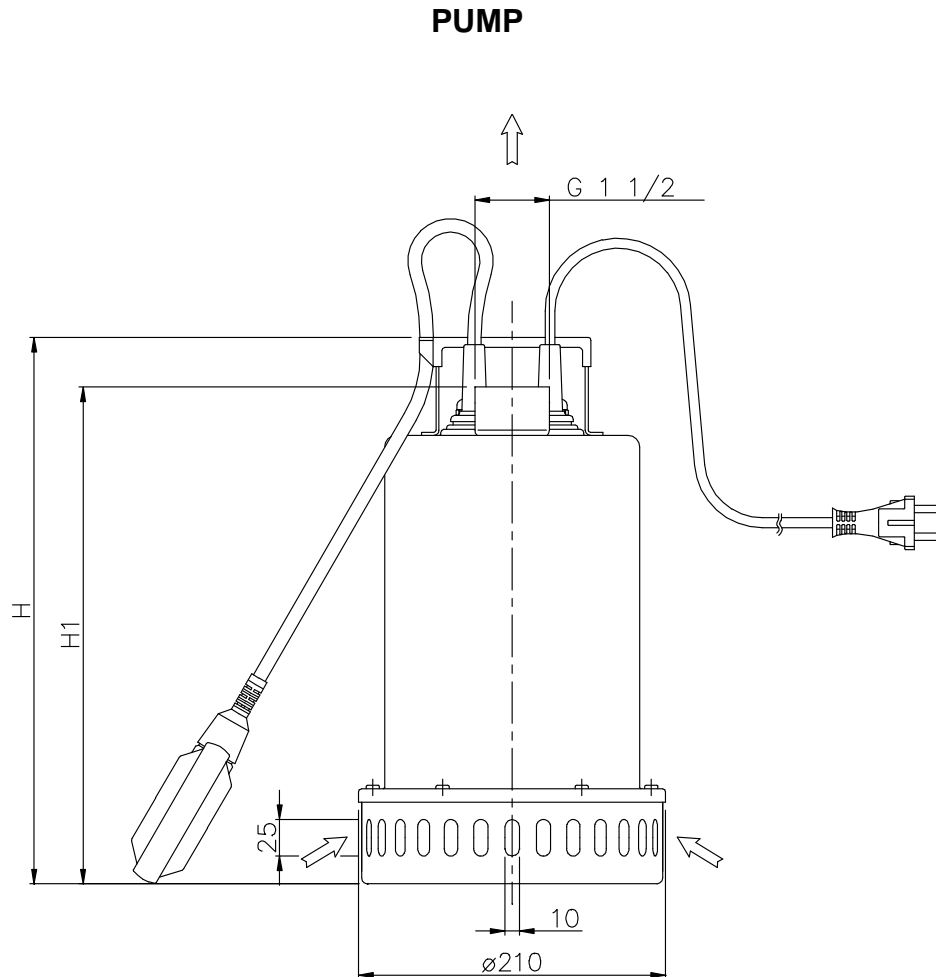

Pump type	Dimensions [mm]		Weight [kgf]		
	H	H1	1~ Automatic (With float switch)	Manual	3~
BEST 2	352	315	12	11.5	11.5
BEST 3	352	315	12.7	12.2	12.2
BEST 4	377	340	13.8	13.3	13.3
BEST 5	377	340	-	-	13.3

**PACKING**

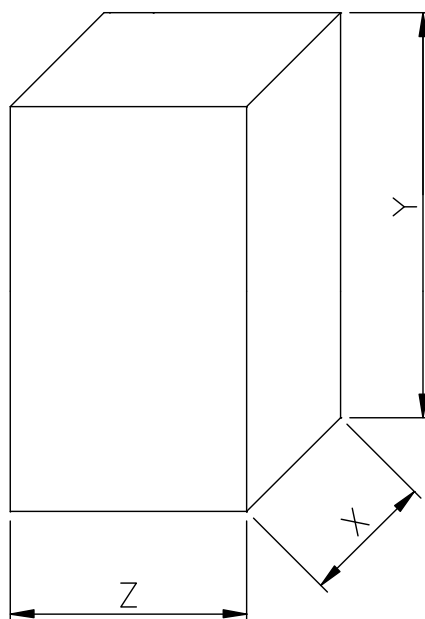

Pump type	Packing [mm]			Weight [kgf]		
	X	Y	Z	1~ Automatic (With float switch)	Manual	3~
BEST 2	227	397	250	12.9	12.4	12.4
BEST 3	227	397	250	13.6	13.1	13.1
BEST 4	227	397	250	14.7	14.2	14.2
BEST 5	227	397	250	-	-	14.2

Pump type		Power		Locked rotor current [A]				Capacitor				Input [kW]		Full load current [A]			
Single Phase	Three Phase	kW	HP	Single Phase		Three Phase		110-115 V		220-230 V		Single Phase	Three Phase	Single Phase		Three Phase	
				110-115 V	220-230 V	220 V	380 V	[μF]	[V]	[μF]	[V]			110-115 V	220-230 V	220 V	380 V
BEST 2M	BEST 2	0,55	0,75			54,7	31,6	56,5	250	16	450	0,99	0,83	10	4,8	3	1,7
BEST 3M	BEST 3	0,75	1,0	48	24	61,5	35,5	31,5	250	16	450	1,3	1,2	12,1	6	3,8	2,2
BEST 4M	BEST 4	1,1	1,5	-	33,7	30,5	17,6	-	-	25	450	1,48	1,4	-	7,2	4,8	2,8
-	BEST 5	1,5	2,0	-	-	30,5	17,6	-	-	-	-	-	1,68	-	-	-	3,2

